








# ABOUT EUROSTEEL


---

**EuroSteel is a manufacturer and distributor of foundation, fencing and fastening products. Under our core EuroSteel brand, we also have our extended X™ fence®, ProFence, and Xtra-Ductile product ranges as well as a service offering branded ECL+.**

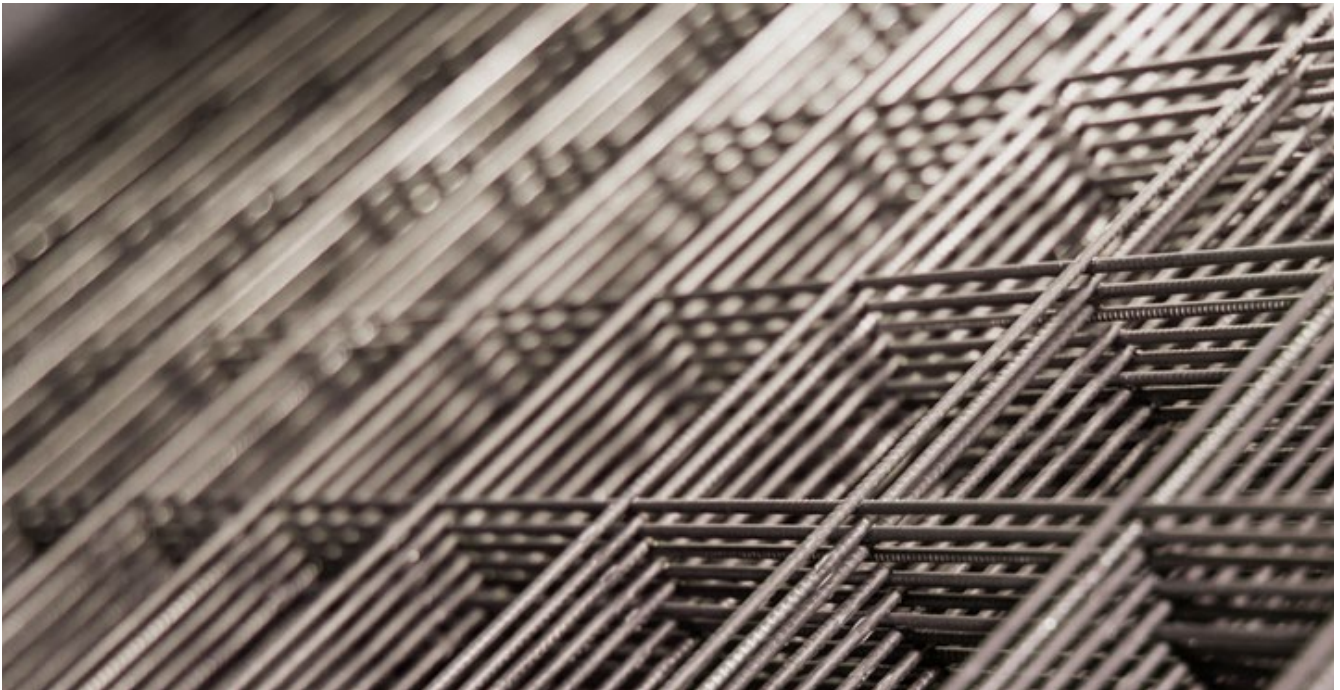

We are a division of Euro Corporation, a New Zealand owned and operated market leader servicing the wider rural, and broader construction industry. Euro Corporation employs over 500 staff spanning eight locations across New Zealand.

# CONTENTS

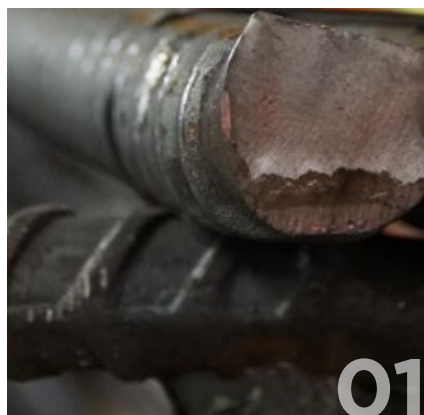

## FOUNDATION PRODUCTS

POLYTHENE BUILDERS FILM	10
POLYSTYRENE PODS	11
POD SPACERS	11
TIE WIRE	11
PLASTIC BAR CHAIRS	12
STARTER SAFETY CAPS	12
PLAIN ROUND GRADE 300E ROD	12
BAR GRADE 300E MILD	13
BAR GRADE 500E HIGH YIELD	13
XTRA-DUCTILE GRADE 500E MESH	14
HARD DRAWN MESH	14
LINKS & STIRRUPS	15
STARTERS	16



## FENCING PRODUCTS

FENCING WIRE	17
EASY BATTEN SYSTEM*	19
EASY BATTEN OUTRIGGER*	19
LACING WIRE & NEEDLES	20
BARBED WIRE	21
BRAIDED WIRE	21
X <sup>TM</sup> FENCE®	22
X <sup>TM</sup> FENCE® HORSE	22
X <sup>TM</sup> FENCE® DOCKING & UTILITY	23
X <sup>TM</sup> FENCE® SECURITY	23
TITE GRIP - DEER & BOUNDARY	24
TITE GRIP - SHEEP FENCE	25
CHAINLINK MESH - IN STOCK	26
CHAINLINK MESH - CUSTOM MADE PER m <sup>2</sup>	27
BAG TIES	27
BAG TOOL	28
HOG RING FASTENING TOOL	28
HOG RINGS	28
GALVANISED HEX WIRE NETTING	29
PVC COATED HEXAGONAL WIRE NETTING	30
SQUARE WELDED NETTING	30




## FASTENING PRODUCTS

PVC COATED SQUARE WELDED NETTING	31
SAFETY FENCE	31
STEEL "Y" POSTS	32
SAFETY CAPS	33
VINEYARD STAKES	33
GATE FITTINGS	33
GUDGEONS - LOCK THROUGH POST	34
GUDGEONS- SCREW IN	34
GUDGEONS - BARBED DRIVE	35
LATCHES	35
WELD ON LUGS AND PINS	35
GUDGEONS - PLATE	36
ADJUSTABLE GATE HINGE	36
HINGE STRAPS	36
ECONOMY CHAINLINK GATES	37
ECONOMY CHAINLINK DEER GATES	37
BARRED GATES	38

GALVANISED FLAT HEAD NAILS	40
GALVANISED TWISTED FLATHEAD	41
GALVANISED JOLT HEAD NAILS	41
GALVANISED A/G DECKING NAILS	41
GALVANISED INSULATOR NAILS	41
GALVANISED PLASTERBOARD CLOUTS	41
GALVANISED ROOFING	42
GALVANISED TWISTED SPRINGHEAD NAILS	42
FENCING STAPLES - LOOSE	42
CONCRETE FENCE POST STAPLES	44
'D' HEAD NAILS WITH MULTI-CAP FUEL CELLS	44
3000 PACK 'D' HEAD NAILS ONLY	45
BOLT COACH - GALVANISED	45
BOLT HEX HEAD - GALVANISED	45
BATTEN SCREWS - GALVANISED	46
COACH SCREWS - GALVANISED	46
WASHERS - GALVANISED	46

# PRODUCT TESTING

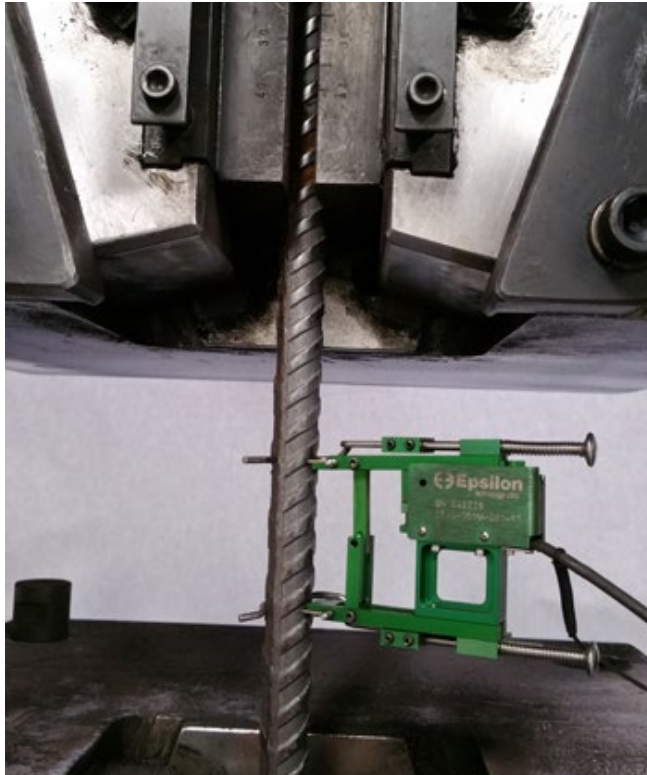

**EuroSteel reinforcing bar (rebar) comes from three key manufacturers. These manufacturers are Amsteel (Malaysia), OneSteel (Australia), and Pacific Steel (New Zealand).**

- Amsteel engages an International Laboratory Accreditation Cooperation (ILAC), known as the Scientific and Industrial Research Institute of Malaysia (SIRIM)
- OneSteel has an ILAC accredited testing facility known as National Association of Testing Authorities, Australia (NATA)
- Pacific Steel has an ILAC accredited testing facility known as International Accreditation New Zealand (IANZ)

EuroSteel also has an ILAC (IANZ) accredited testing facility at its Auckland location. Testing is completed independently via Holmes Solutions.

Xtra-Ductile GRADE 500E Mesh undergoes testing through this independently run IANZ facility.

Test certificates are available by request.



# Holmes Solutions

Level 3, 27th Street West  
Christchurch Central Business District  
PO Box 4016  
Upper Riccarton, Christchurch 8140  
New Zealand  
holmes@holmes.co.nz

PRODUCT SUPPLIER: Euro-Construction  
PRODUCT NAME: Ductile Mesh 500E  
PRODUCT DESCRIPTION: REINFORCING STEEL CLASS: 500E  
BATCH NUMBER: 000000  
CAST NUMBER: 000000  
TESTING DATE: 20/01/2020  
CATCH LENGTH (mm): 50 mm ± 2 mm  
FIBRE LENGTH: 200 mm  
TESTING STANDARDS: AS 3602/2007 and ISO 15630-2:2005, as specified in AS/NZS 4671:2007 and BS1444 Part 2:2005

## NOTES:

Samples supplied by client. All samples aged at 100°C for 1hr and then air cooled. Weld shear samples held with Type C jig.

Ultimate Tensile	Max Load	R <sub>m</sub> (MPa)	Yield Stress R <sub>eH</sub> (MPa)	Proof Stress R <sub>p0.2</sub> (MPa)	Elongation A <sub>g</sub> (%)
Min	500	500	500	500	20%
Max	500	500	500	500	20%
Mesh 1	35.1	571	480	1.30	13.8%
Mesh 2	35.9	565	480	1.31	14.4%
Mesh 3	35.8	571	479	1.28	13.0%
Mesh 4	35.9	571	479	1.30	13.1%
Mesh 5	35.7	565	480	1.28	13.0%
Mesh 6	35.8	565	480	1.29	13.4%
Bar AVERAGE	35.8	565	480	1.31	13.0%
Weld Mesh Strength	Max Load	Yield Stress R <sub>eH</sub> (MPa)	% of Yield		
Min	500	500	100%		
Max	500	500	100%		
Weld Mesh 1	15.6	555	100%		
Weld Mesh 2	15.8	555	100%		
Weld Mesh 3	15.7	555	100%		
Weld Mesh 4	15.8	555	100%		
Weld Mesh 5	15.7	555	100%		
Weld Mesh 6	15.8	555	100%		
AVERAGE	15.7	555	100%		

The results presented above are a true and accurate record obtained from the tested samples supplied by the client. This report shall not be reproduced except in full, without approval of this laboratory.

Test Engineer:

  
Chuan Wong

Approved Signatory

  
Chris Allington

Holmes

IANZ

New Zealand Testing Certificate Number  
IANZ Cert 100077 (2020) Issue  
Page 1 of 2



# ADDITIONAL PRODUCT CERTIFICATION

**Additional to batch testing, EuroSteel rebar product is also certified by independent bodies, including Bureau Veritas and the Australasian Certification Authority for Reinforcing and Structural Steels (ACRS).**

EuroSteel rebar supplied by Amsteel is represented by the S Mark symbol. It is the only rebar in New Zealand to undergo this product certification. Certification shows the sizes and grades this endorsement applies to, and is available on request.

The S Mark is a scheme conducted by a world leader in independent, third-party testing and inspection: Bureau Veritas. Bureau Veritas has been servicing the industry since 1828 and employs 66,500 staff in operations across 140 countries. The S Mark scheme is government-accredited under the Joint Accreditation System of Australia and New Zealand (JAS-ANZ), an endorsement that Bureau Veritas is competent, credible and independent.

Rebar supplied by Pacific Steel, Amsteel and OneSteel is assessed using ACRS product certification scheme. These certificates show the sizes and grades certified by each producer, and are available on request. The scheme is also JAS-ANZ accredited.







# FOUNDATION PRODUCTS

---

EuroSteel offers a suite of products geared towards residential foundations. We cover all products for the slab and deliver nationwide.






PL10025C



PL250250

## POLYTHENE BUILDERS FILM

EuroSteel's multipurpose builder's film is commonly used in construction sites or any general areas where strong cover or underlay is required.

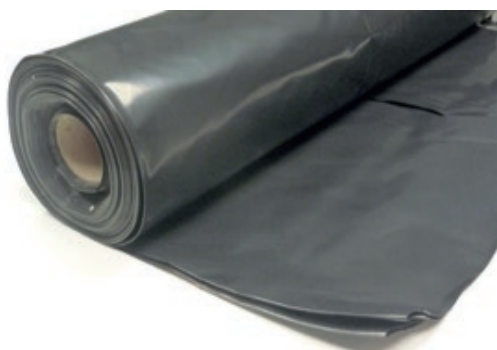

ITEM CODE	DESCRIPTION
PL10025B	Polythene 100 Micron x 2m x 5m Black
PL10025C	Polythene 100 Micron x 2m x 5m Clear
PL100210B	Polythene 100 Micron x 2m x 10m Black
PL100220B	Polythene 100 Micron x 2m x 20m Black
PL125450	Polythene 125 Micron X 4m X 50m Black
PL20025B	Polythene 200 Micron x 2m x 5m Black
PL200210B	Polythene 200 Micron x 2m x 10m Black
PL200410B	Polythene 200 Micron x 4m x 10m Black
PL250250	Polythene 250 Micron X 2m X 50m Black
PL25045	Polythene 250 Micron x 4m x 5m Black
PL250410	Polythene 250 Micron x 4m x 10m Black
PL250425	Polythene 250 Micron X 4m X 25m Black
PL250450	Polythene 250 Micron X 4m X 50m Black
PLTAPE	POLY JOINING TAPE 48mm X 30m

## POLYSTYRENE PODS

Used in residential concrete slabs.  
Lightweight, strong and affordable.  
Polystyrene pods act as a void former  
for concrete slabs on ground.

ITEM CODE	DESCRIPTION
EIWP220	POD STANDARD 1.1m X 1.1m X 220mm
EIWP300	POD STANDARD 1.1m X 1.1m X 300mm



## POD SPACERS

These form an internal beam between  
polystyrene pods to support reinforcing  
bars. Designed to ensure continuous  
concrete flow and ideal for use in  
slab-on-ground applications with  
polystyrene pods.

ITEM CODE	DESCRIPTION
EIPL100	PODLOCK CENTRE SPACER (PL100)
EIPL101	PODLOCK CLIP ON SPACER (PL101)
SPUNI	POD SPACER UNIMAX



## TIE WIRE

Used in construction or daily use as binding wire or wire ties. Available in Black  
Annealed and Galvanised.

ITEM CODE	DESCRIPTION	QUANTITY PER PACK
W230A	1.6 mm Black Annealed x 230mm x 1kg Bundle	25
W300A	1.6 mm Black Annealed x 300mm x 1kg Bundle	25
W400A	1.6 mm Black Annealed x 400mm x 1kg Bundle	25
W230GALV	1.6 mm Galvanised x 230mm x 1kg Bundle	25
W300GALV	1.6 mm Galvanised x 300mm x 1kg Bundle	25
W400GALV	1.6 mm Galvanised x 400mm x 1kg Bundle	25
WBA2.525	2.5mm Black Annealed TieWire x 25kg Coil	1



W230A



W300A



W400A



W400GALV



## PLASTIC BAR CHAIRS & STARTER SAFETY CAPS

Used for accurate placement of reinforcing mesh or bar.  
Polystyrene pods act as a void former for concrete slabs on ground.

ITEM CODE	DESCRIPTION	QUANTITY PER PACK	ORDER QUANTITY
EIPOD40	PODRAIL 40mm WITH SPIKES	20	1
PLCH001/20	25/40 Slab Mesh Support	20	1
PLCH006/20	50/65 Slab Mesh Support	20	1
PLCH001/100	25/40 Slab Mesh Support	100	1
PLCH006/100	50/65 Slab Mesh Support	100	1
PLCH020/100	75/90 Slab Mesh Support	100	1
PLCH030/50	85/100 Slab Mesh Support	50	1
REOSBC/20	10mm-32mm Safety Starter Cap	20	1
REOSBC/100	10mm-32mm Safety Starter Cap	100	1
EPSTICK40	40mm Pod Stick	30	1



PLCH001-100



PLCH006-100



PLCH020-100



PLCH030-50



REOSBC



EPSTICK40

## PLAIN ROUND GRADE 300E ROD

**EuroSteel reinforcing bar** is also known as rebar and reinforcing bar or rod. **Available in 6m bars.**

ITEM CODE	DESCRIPTION	PIECES PER BUNDLE
R6-300	R6mm x 6m Plain Round Rod	50
R10-300	R10mm x 6m Plain Round Rod	50
R12-300	R12mm x 6m Plain Round Rod	50
R16-300	R16mm x 6m Plain Round Rod	50



R6-300

## BAR GRADE 300E MILD

*Available in 6m bars.*

ITEM CODE	DESCRIPTION	PIECES PER BUNDLE
D10-300	D10 x 6m Deformed Bar	276
D12-300	D12 x 6m Deformed Bar	192
D16-300	D16 x 6m Deformed Bar	108
D20-300	D20 x 6m Deformed Bar	each



## BAR GRADE 500E HIGH YIELD

**EuroSteel reinforcing bar** is manufactured using the superior Micro Alloy (MA) process. Also known as high tensile rebar and reinforcing rod or bar.

*Available in 6m bars*

ITEM CODE	DESCRIPTION	PIECES PER BUNDLE
D10-500	HD10 x 6m Deformed Bar	276
D12-500	HD12 x 6m Deformed Bar	192
D16-500	HD16 x 6m Deformed Bar	108
D20-500	HD20 x 6m Deformed Bar	each
D25-500	HD25 x 6m Deformed Bar	each
D32-500	HD32 x 6m Deformed Bar	each




## Xtra-Ductile GRADE 500E MESH

**EuroSteel Xtra-Ductile™ is GRADE 500E double-edge steel mesh** which is used for reinforcing concrete. The double edge makes lapping reinforcing mesh easy.


ITEM CODE	DESCRIPTION	KN/M	SHEET SIZE	NET CVR (m <sup>2</sup> )
SE620-500SMALL	SE620-500SMALL Xtra-Ductile Mesh	73	4.68m X 2.05m	7.61
SE620-500DESTD	SE620-500DESTD Xtra-Ductile Mesh	73	5.83m x 2.37m	12.24
SE730-500DESTD*	SE730-500DESTD Xtra-Ductile Mesh	74	5.03m x 2.27m	10.08
SE730-500DELGE*	SE730-500DELGE Xtra-Ductile Mesh	74	7.13m x 2.27m	14.49
SE720-500DESTD	SE720-500DESTD Xtra-Ductile Mesh	96	5.83m x 2.37m	12.24
SE820-500DESTD	SE820-500DESTD Xtra-Ductile Mesh	128	5.83m x 2.37m	12.24
SE920-500DESTD	SE920-500DESTD Xtra-Ductile Mesh	159	5.83m x 2.37m	12.24




M665HANDY

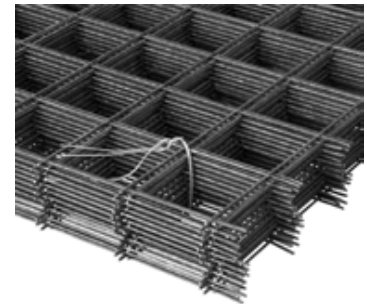


SE620-500SMALL

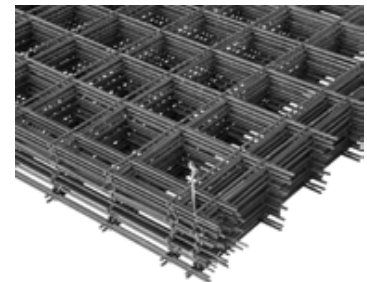

SE720-500DESTD

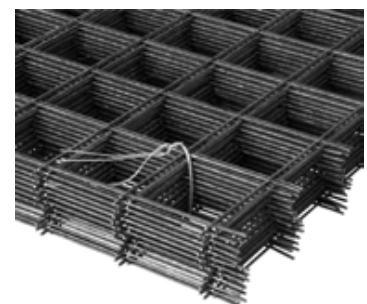

SE730-500DESTD

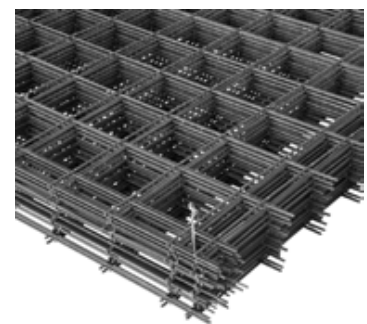

SE820-500DESTD

## HARD DRAWN MESH

**EuroSteel hard drawn steel mesh** is used for reinforcing concrete where GRADE 500E ductile mesh is not specified.

ITEM CODE	DESCRIPTION	SHEET SIZE	NET CVR (m <sup>2</sup> )
M665HANDY	665 Handy Mesh	1.97m X 0.98m	1.35
M66110*	661 Mesh Standard	4.56m x 1.97m	7.525
M66210*	662 Mesh Standard	4.56m x 1.97m	7.525
M66310	663 Mesh Standard	4.56m X 1.97m	7.525
M66410*	664 Mesh Standard	4.56m X 1.97m	7.525
M66510	665 Mesh Standard	4.56m X 1.97m	7.525
M66810	668 Mesh Standard	4.56m X 1.97m	7.525
M66115*	661 Mesh Large	6.06m X 2.42m	12.76
M66315*	663 Mesh Large	6.06m X 2.42m	12.76
M66515	665 Mesh Large	6.06m X 2.42m	12.76
M66815*	668 Mesh Large	6.06m X 2.42m	12.76
MD84/10	84 Mesh D/Edge	4.9m x 2.2m	10.08
MD147/10	147 Mesh D/Edge	4.9m x 2.2m	10.08
M147L*	148 Rib Mesh	6.9m x 2.4m	13.86
M212L*	149 Rib Mesh	6.9m x 2.4m	13.86

\* Made to order



## LINKS & STIRRUPS

**EuroSteel stirrups are GRADE 300E and manufactured using machinery that makes exact bends within NZ reinforcing specification.** Stirrups are used for assembling of various reinforcing beams and assemblies.

ITEM CODE	DESCRIPTION	PIECES PER BUNDLE
LR690	R6 Links x 90mm	25
LR6100	R6 Links x 100mm	25
LR6150	R6 Links x 150mm	25
LR6200	R6 Links x 200mm	25
LR6250	R6 Links x 250mm	25
LR6300	R6 Links x 300mm	25
LR6400	R6 Links x 400mm	MTO
LR6500	R6 Links x 500mm	MTO



LR6150



LR6250



LR10250



LR10300

LR10200	R10 Links x 200mm	25
LR10250	R10 Links x 250mm	25
LR10300	R10 Links x 300mm	25
LR10350	R10 Links x 350mm	25
LR10400	R10 Links x 400mm	MTO
LR10500	R10 Links x 500mm	MTO
LR10600	R10 Links x 600mm	25

STPR61515	R6 Stirrup 150 x 150mm	25
STPR62010	R6 Stirrup 200 x 100mm	25
STPR62015	R6 Stirrup 200 x 150mm	25
STPR62020	R6 Stirrup 200 x 200mm	25
STPR62515	R6 Stirrup 250 x 150mm	25
STPR62525	R6 Stirrup 250 x 250mm	25
STPR62530	R6 Stirrup 250 x 300mm	25
STPR63020	R6 Stirrup 300 x 200mm	25
STPR63030	R6 Stirrup 300 x 300mm	25



STPR63020



STPR63030



STPR102525



STPR103030

STPR101515	R10 Stirrup 150 x 150mm	25
STPR102525	R10 Stirrup 250 x 250mm	25
STPR103030	R10 Stirrup 300 x 300mm	25

## STARTERS

Used to tie concrete or masonry walls to slabs and footings.

ITEM CODE	DESCRIPTION	PIECES PER BUNDLE
D12_600X600CNR	D12 CORNER BAR 600 x 600mm	25
HD12_800X800CNR	HD12 CORNER BAR 800 X 800mm	25
D16_650X650CNR	D16 CORNER BAR 650 x 650mm	25
STRD101.2X150HB	D10 ROD STARTER HOOKED 1200 x 150mm	25
STRD121.2X150HB	D12 ROD STARTER HOOKED 1200 x 150mm	25
STRD10-1000	D10 STARTER ROD 1.0m	25
STRD10-1200	D10 STARTER ROD 1.2m	25
STRD10-1500	D10 STARTER ROD 1.5m	25
STRD12-1000	D12 STARTER ROD 1.0m	25
STRD12-1200	D12 STARTER ROD 1.2m	25
STRD12-1500	D12 STARTER ROD 1.5m	25
STRD101000150	D10 STARTER ROD 1.0m x 150mm 'L' HOOK	25
STRD101200150	D10 STARTER ROD 1.2m x 150mm 'L' HOOK	25
STRD101500150	D10 STARTER ROD 1.5m x 150mm 'L' HOOK	25
STRD121000150	D12 STARTER ROD 1.0m X 150mm 'L' HOOK	25
STRD121200150	D12 STARTER ROD 1.2m X 150mm 'L' HOOK	25
STRD121500150	D12 STARTER ROD 1.5m X 150mm 'L' HOOK	25



STRD10-1000



STRD10-1200



STRD12-1200



STRD101-2X150HB



STRD121200150

# FENCING PRODUCTS

---

Manufactured from premium steel, EuroSteel farm fencing products cater for any wire fencing need. Our products are manufactured to endure New Zealand's harsh conditions, and suit a variety of animals including dairy and beef cattle, horses, alpacas, llamas, sheep, lamb and deer.



## FENCING WIRE

EuroFence fencing wire is manufactured from high grade steel, coated with XtraLife zinc/aluminium coating (mix of 5% aluminium and 95% zinc). Xtralife zinc/aluminium is an advanced coating that provides both barrier and galvanic protection from a single coating.



## FENCING WIRE

ITEM CODE	DESCRIPTION	GAUGE	COIL LENGTH	BREAKING LOAD	RECOMMENDED TENSION	QUANTITY PER PACK
HIGH TENSILE			Per 25kg (M)	kg	kg	
WF1.6HT	1.60mm High Tensile Xtralife (2 Life) 25kg	16	1584	220	80	1
WF2.0HT	2.00mm High Tensile Xtralife (2 Life) 25kg	14	1013	395	110	1
WF2.5HT(10KG)	2.50mm High Tensile Xtralife (2 Life) 10kg	12.5	260	620	150	1
WF2.5HTEP	2.50mm High Tensile Xtralife (2 Life) 25kg	12.5	650	620	150	40
WF2.5HTEP(PW)	2.50mm High Tensile Wiremark (2 Life) 25kg	12.5	650	620	150	40
WF2.5HTCST	2.50mm High Tensile Xtralife Plus (4 Life) 25kg	12.5	650	620	150	40
WF2.5HTV	2.50mm High Tensile Xtralife (2 Life) x 1000m/39kg	12.5	650	620	150	26
WF3.15HT	3.15mm High Tensile Xtralife (2 Life) 25kg	10	408	835	200	40
WF3.15HT(PW)	3.15mm High Tensile Wiremark (2 Life) 25kg	10	408	835	200	40
WF3.15HTCST	3.15mm High Tensile Xtralife Plus (4 Life) 25kg	10	408	835	200	40
WF4.0HT	4.00mm High Tensile Xtralife (2 Life) 25kg	8	253	835	300	1
MEDIUM TENSILE	Most commonly used for strapping materials. Suitable for equine fencing.					
WS3.15MT	3.15mm Medium Xtralife (2 Life) 25kg	10	408	630	250	40
LOW TENSILE (SOFT)	Suitable for equine fencing					
WF2.5S	2.50mm Soft Xtralife (2 Life) 25kg	12.5	650	215	80	1
WF3.15S	3.15mm Soft Xtralife (2 Life) 25kg	10	408	365	150	40
WF4.0S	4.00mm Soft Xtralife (2 Life) 25kg	8	253	590	250	40

### KEY TERMS:

- 1. Ultimate tensile strength:** The maximum pulling or stretching stress a material can withstand before failing. Ultimate tensile strength is measured in force per unit area, e.g. newtons per square mm, N/mm<sup>2</sup>
- 2. Breaking load:** The load that a wire can withstand before breaking e.g. EuroFence 2.5HT has a breaking load of 620kg.
- 3. Recommended tension:** The recommended load applied to the wire at installation.



WF2.5HT(10KG)



WF2.5HTV



WF3.15HT



WF4.0S

## RECOMMENDED LOAD

WIRE GAUGE	HIGH TENSILE	LOW/SOFT TENSILE
2.50mm	150 kgs	80kgs
3.15mm	200kgs	150kgs
4.00mm	300kgs	250kgs

**High tensile wire** is the wire of choice when building a conventional or electric fence.

High tensile wire will result in a more resilient stock proof fence, compared with soft wire

## BREAKING LOAD


WIRE GAUGE	HIGH TENSILE	LOW/SOFT TENSILE
2.50mm	620 kgs	215 kgs
3.15mm	835 kgs	408 kgs
4.00mm	1,405 kgs	509 kgs

## EASY BATTEN SYSTEM\*

**Ideal for new fences** and a quick and easy way to replace old and damaged battens on existing fence lines. **Lightweight and strong. Naturally insulated for electrical use. Cost effective. 5 year warranty.**

ITEM CODE	DESCRIPTION	PIECES PER BUNDLE
EB 3/9 25PK	Easy batten suitable for 3&9 wire	25
EB 3/9 50PK	Easy batten suitable for 3&9 wire	50
EB 5/7 25PK	Easy batten suitable for 5&7 wire	25
EB 5/7 50PK	Easy batten suitable for 5&7 wire	50
EB 6/8 25PK	Easy batten suitable for 6&8 wire	25
EB 6/8 50PK	Easy batten suitable for 6&8 wire	50
* exclusively available at Farmlands		

## EASY BATTEN LINE DRAWINGS

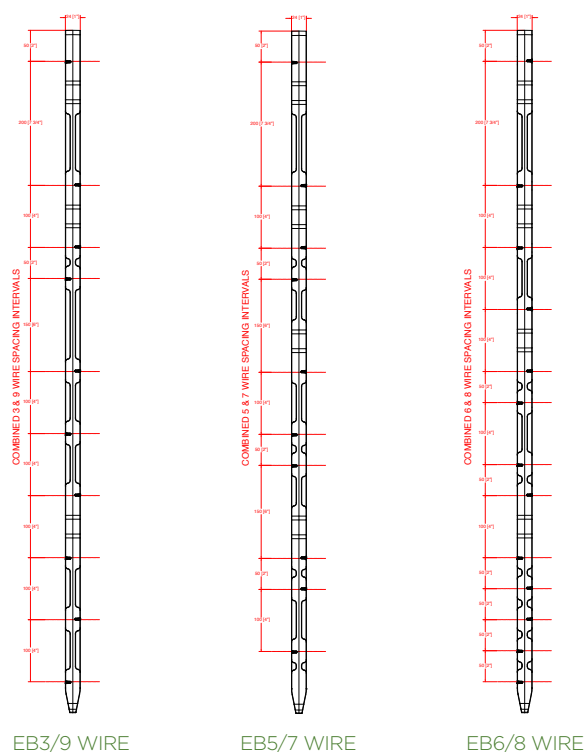

## EASY BATTEN OUTRIGGER\*

**Designed to carry multiple wire or tape configurations.**

Easily attached to the batten with no need for tools or staples. Can be nailed to regular wooden fence posts, used in vertical position on top of wooden posts or rail to extend the fence height.

ITEM CODE	DESCRIPTION	PIECES PER BUNDLE
OR 175MM 25PK	Easy batten outrigger 175mm	25
OR 175MM 50PK	Easy batten outrigger 175mm	50
OR 300MM 25PK	Easy batten outrigger 300mm	25
OR 300MM 50PK	Easy batten outrigger 300mm	50
OR 400MM 25PK	Easy batten outrigger 400mm	25
OR 400MM 50PK	Easy batten outrigger 400mm	50
* exclusively available at Farmlands		

## LACING WIRE & NEEDLES

Suitable for electric fencing and use in vineyards and orchards as training and support wire.

ITEM CODE	DESCRIPTION	APPROX M (PER COIL)	WEIGHT	QUANTITY PER PACK
WF1.6S(500gm)	1.6mm Soft	32	500g	5
WF1.6S(5kg)	1.6mm Soft	317	5kg	1
WF1.6S(10kg)	1.6mm Soft	634	10kg	1
WF2.0S(500gm)	2.0mm Soft	20	500g	5
WF2.0S(5kg)	2.0mm Soft	205	5kg	1
WF2.0S(10kg)	2.0mm Soft	410	10kg	1
WF4.0S(5kg)	4.0mm Soft	51	5kg	1

Commonly used for lacing chainlink netting to steel pipe

ITEM CODE	DESCRIPTION	APPROX M (PER NEEDLE)	WEIGHT	QUANTITY PER PACK
WFLN1.6S	Lacing Needle - 1.6mm Soft (62m)	62m		1
WFLN2.0S	Lacing Needle - 2.0mm Soft (62m)	62m		1



WF4-0S



WFLN2-0S



## BARBED WIRE

### Four-point barbed wire with a continuous twist.

2.5mm soft wire as line wires. 75mm or 150mm barbed spacings and barbs made of 2.0mm soft wire. Primarily used in rural fencing applications. Commonly used for stock containment. Prevents batten slop.

ITEM CODE	DESCRIPTION	WEIGHT	BARB SPACING	APPROX M (PER 25KG COIL)	QUANTITY PER PACK
WFBARB2.5/75	2.5mm Soft	25kg	75mm	240m	1
WFBARB2.5/150	2.5mm Soft	25kg	150mm	260m	1



WFBARB2.5/75

High tensile barbed wire. Reverse twist design alternates the direction of the two wires at the barbs to reduce sagging and hold the barbs in place. Primarily used in security fencing applications.

ITEM CODE	DESCRIPTION	BARB SPACING	APPROX M PER COIL	QUANTITY PER PACK
WFBARB1.6RT100S	1.6mm HT	100mm	100m	1
WFBARB1.6RTHT	1.6mm HT	100mm	500m	1
WFBARB1.6RT150	1.6mm HT	150mm	500m	1



WFBARB1.6RT100S

## BRAIDED WIRE

### Commonly used for stock containment.

Prevents batten slop.

ITEM CODE	DESCRIPTION	WEIGHT	APPROX M PER COIL	QUANTITY PER PACK
WFBRAID2.5	2.5mm Soft Braided Wire	25kg	320m	1



WFBRAID2.5

## X™ fence®

A premium strength knot for a premium netting. 24% stronger knot than Tite Grip. Smooth, animal friendly 'forged knot' that will not snag animal fur or damage skin. Pre-stripped roll ends – 500mm wire on each end of roll for tying/joining. Additional end wrap on stay wire. 2.5mm knot wire.

### X™ fence® DEER

*Line 2.5mm HT*

*Stay 2.5mm MT*

*Knot 2.5mm LT*

ITEM CODE	LINE WIRES	HEIGHT	VERTICAL SPACING	LENGTH
XH13/190/15100	13 Line	190cm	15cm	100m
XH13/190/30100	13 Line	190cm	30cm	100m

Commonly used for sheep and beef

XH8/90/15100	8 Line	90cm	15cm	100m
XH8/90/30100	8 Line	90cm	30cm	100m
XH8/90/3050	8 Line	90cm	30cm	50m
XH8/80/30100	8 Line	80cm	30cm	100m
XH8/80/3050	8 Line	80cm	30cm	50m



XH8-90-30-100



XH13-190-30-100



XM16-152-550

### X™ fence® HORSE

Commonly used for equine fencing.

*Line 2.5mm MT*

*Stay 2.5mm MT*

*Knot 2.5mm LT*

ITEM CODE	LINE WIRES	HEIGHT	VERTICAL SPACING	LENGTH
XM10/90/550	10 Line	90cm	5cm	50m
XM13/122/550	13 Line	122cm	5cm	50m
XM16/152/550	16 Line	152cm	5cm	50m



XM10-90-550

## X™ fence® DOCKING & UTILITY

Commonly used for docking and lifestyle fencing applications.

*Line 2.0mm MT*

*Stay 2.0mm MT*

*Knot 2.0mm LT*

ITEM CODE	LINE WIRES	HEIGHT	VERTICAL SPACING	LENGTH
XHL11/85/1550	11 Line	85cm	15cm	50m (2mm)



XHL11-85-1550

## X™ fence® SECURITY

A premium strength knot for a premium netting. Performs significantly better than chainlink against cut attack and ram raid. Pre-stripped roll ends - 500mm wire on each end of roll for tying/joining. Additional end wrap on stay wire. 2.5mm knot wire.

*Line 2.5mm MT*


*Stay 2.5mm MT*

*Knot 2.5mm LT*

ITEM CODE	LINE WIRES	HEIGHT	VERTICAL SPACING	LENGTH
XM19/180/515	19 Line	180cm	5cm	15m
XM19/180/530	19 Line	180cm	5cm	30m



XM19-180-530

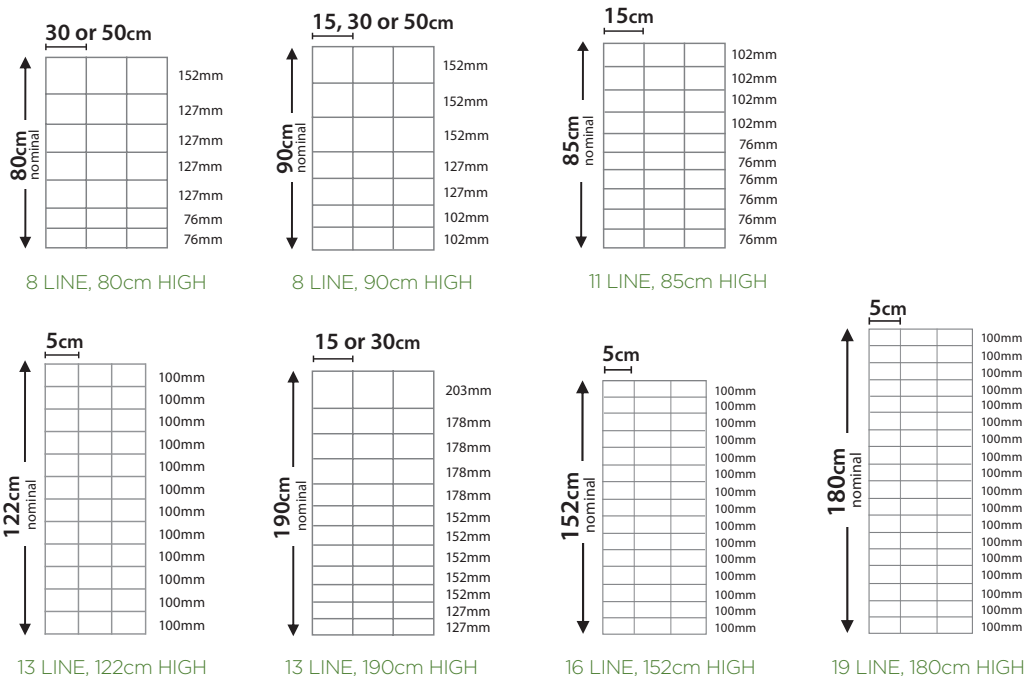

## TITE GRIP - DEER & BOUNDRY

*Line 2.5mm HT*

*Stay 2.5mm MT*

*Knot 2.24mm LT*


ITEM CODE	LINE WIRES	HEIGHT	VERTICAL SPACING	LENGTH	MINIMUM ORDER QUANTITY
WFF17/190/15100	17 Line	190cm	15cm	100m	30 rolls
WFF17/190/30100	17 Line	190cm	30cm	100m	50 rolls
WFF13/190/15100	13 Line	190cm	15cm	100m	
WFF13/190/30100	13 Line	190cm	30cm	100m	
WFF11/155/15100	11 Line	155cm	15cm	100m	
WFF11/155/30100	11 Line	155cm	30cm	100m	
WFF5/90/30200	5 Line	90cm	30cm	200m	
WFF4/60/30200	4 Line	60cm	30cm	200m	



WFF13-190-30-100



WFF11-155-30-100

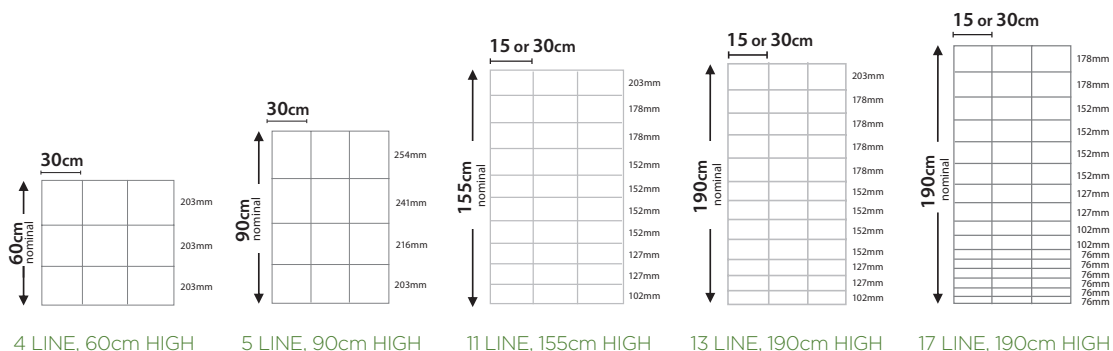



TITE GRIP - SHEEP FENCE


ITEM CODE	LINE WIRES	HEIGHT	VERTICAL SPACING	LENGTH
WFF8/80/15100	8 Line	80cm	15cm	100m
WFF8/80/30100	8 Line	80cm	30cm	100m
WFF8/80/30200	8 Line	80cm	30cm	200m
WFF8/90/1550	8 Line	90cm	15cm	50m
WFF8/90/15100	8 Line	90cm	15cm	100m
WFF8/90/3050	8 Line	90cm	30cm	50m
WFF8/90/30100	8 Line	90cm	30cm	100m
WFF8/90/30200	8 Line	90cm	30cm	200m
WFF7/90/1550	7 Line	90cm	15cm	50m
WFF7/90/15100	7 Line	90cm	15cm	100m
WFF7/90/3050	7 Line	90cm	30cm	50m
WFF7/90/30100	7 Line	90cm	30cm	100m



WFF8-90-30-100



WFF8-90-3050

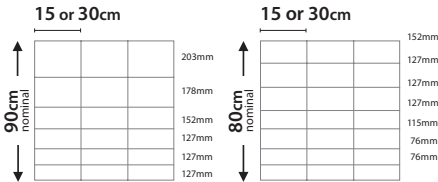

7 LINE, 90cm HIGH

8 LINE, 80cm HIGH

## CHAINLINK MESH - IN STOCK

**Chainlink fencing** is used for dog kennels and runs, security, motorway and pedestrian fences.

ITEM CODE	DESCRIPTION	DIAMOND SIZE	WIRE DIAMETER	HEIGHT	LENGTH
CLHG50250910	XTRALIFE C/LINK 50mm x 2.50mm x 900mm x 10m	50mm	2.50mm	900mm	10m
CLHG50250915	XTRALIFE C/LINK 50mm x 2.50mm x 900mm x 15m	50mm	2.50mm	900mm	15m
CLHG50250930	XTRALIFE C/LINK 50mm x 2.50mm x 900mm x 30m	50mm	2.50mm	900mm	30m
CLHG50251215	XTRALIFE C/LINK 50mm x 2.50mm x 1200mm x 15m	50mm	2.50mm	1200mm	15m
CLHG50251230	XTRALIFE C/LINK 50mm x 2.50mm x 1200mm x 30m	50mm	2.50mm	1200mm	30m
CLHG50251515	XTRALIFE C/LINK 50mm x 2.50mm x 1500mm x 15m	50mm	2.50mm	1500mm	15m
CLHG50251810	XTRALIFE C/LINK 50mm x 2.50mm x 1800mm x 10m	50mm	2.50mm	1800mm	10m
CLHG50251815	XTRALIFE C/LINK 50mm x 2.50mm x 1800mm x 15m	50mm	2.50mm	1800mm	15m
CLHG50251830	XTRALIFE C/LINK 50mm x 2.50mm x 1800mm x 30m	50mm	2.50mm	1800mm	30m
CLHG50252415	XTRALIFE C/LINK 50mm x 2.50mm x 2400mm x 15m	50mm	2.50mm	2400mm	15m
CLHG75250910	XTRALIFE C/LINK 75mm x 2.50mm x 900mm x 10m	75mm	2.50mm	900mm	10m
CLHG75250915	XTRALIFE C/LINK 75mm x 2.50mm x 900mm x 15m	75mm	2.50mm	900mm	15m
CLHG75250930	XTRALIFE C/LINK 75mm x 2.50mm x 900mm x 30m	75mm	2.50mm	900mm	30m
CLHG75251815	XTRALIFE C/LINK 75mm x 2.50mm x 1800mm x 15m	75mm	2.50mm	1800mm	15m



CLHG50250910



CLHG50250930



CLHG50251830




CLHG75250930



CLHG50251810



50mm Mesh



75mm Mesh

## CHAINLINK MESH - CUSTOM MADE PER M²

**Chainlink fencing** is used for dog kennels and runs, security, motorway and pedestrian fences.

ITEM CODE	DESCRIPTION
CLHG2525SQMT	C/LINK 25mm x 2.5mm per Sqm
CLHG25315SQMT	C/LINK 25mm x 3.15mm per Sqm
CLHG3825SQMT	C/LINK 38mm x 2.5mm per Sqm
CLHG38315SQMT	C/LINK 38mm x 3.15mm per Sqm
CLHG5025SQMT	C/LINK 50mm x 2.5mm per Sqm
CLHG50315SQMT	C/LINK 50mm x 3.15mm per Sqm
CLHG7525SQMT	C/LINK 75mm x 2.5mm per Sqm
CLHG75315SQMT	C/LINK 75mm x 3.15mm per Sqm
CLBLK5032SQMT	PVC C/LINK 50mm x 3.20mm Black per Sqm

## BAG TIES

**These ties are quite often used to close bags** such as sacks that contain fertiliser or animal feed, or as a fast way of fixing chain link netting or tying reinforcing bar.

ITEM CODE	SIZE	QUANTITY (PER BUNDLE)
WBT1002*	100mm	2000
WBT110	110mm	1000
WBT150	150mm	1000
WBT200	200mm	1000
WBT250	250mm	1000
WBT300	300mm	1000
WBT340	340mm	1000

\*buy in code



WBT150



WBT200



WBT250



WBT300

**BAG TOOL**

A **tying tool** used to tie bags.

ITEM CODE	DESCRIPTION
BTOOLHD	Rubber Handle Bag Tie Tool



**HOG RING FASTENING TOOL**

**Compact body and sturdy design.** Easy loading magazine used with RP-22 hog rings.

ITEM CODE	DESCRIPTION
TRP22	RP-22 Hog Ring Fastener Tool



**HOG RINGS**

**Used to secure netting to strainer wires when erecting a fence.**

ITEM CODE	DESCRIPTION	QUANTITY (PER PACK)
WRP22AHR	RP-22 Zinc/Aluminium	1000



HX90135



HX90255



HX901350



HX902550



HX2005050



HX2007550



## GALVANISED HEX WIRE NETTING

**Hot dipped galvanised after hex netting woven.** Commonly used for chicken coops, bird aviaries and rabbit hutches.

ITEM CODE	DESCRIPTION	WIDTH	DIAMOND SIZE	GAUGE	LENGTH	ORDER QUANTITY
HX90135	Netting - Hex 900x13x0.7mm 5m Galv	900mm	13mm	0.7mm	5m	9
HX901310	Netting - Hex 900x13x0.7mm 10m Galv	900mm	13mm	0.7mm	10m	6
HX901350	Netting - Hex 900x13x0.7mm 50m Galv	900mm	13mm	0.7mm	50m	1
HX90195	Netting - Hex 900x19x0.9mm 5m Galv	900mm	19mm	0.9mm	5m	9
HX901910	Netting - Hex 900x19x0.9mm 10m Galv	900mm	19mm	0.9mm	10m	6
HX901950	Netting - Hex 900x19x0.9mm 50m Galv	900mm	19mm	0.9mm	50m	1
HX90255	Netting - Hex 900x25x0.9mm 5m Galv	900mm	25mm	0.9mm	5m	9
HX902510	Netting - Hex 900x25x0.9mm 10m Galv	900mm	25mm	0.9mm	10m	6
HX902550	Netting - Hex 900x25x0.9mm 50m Galv	900mm	25mm	0.9mm	50m	1
HX90505	Netting - Hex 900x50x1.0mm 5mtr Galv	900mm	50mm	1.0mm	5m	9
HX905010	Netting - Hex 900x50x1.0mm 10mtr Galv	900mm	50mm	1.0mm	10m	6
HX905050	Netting - Hex 900x50x1.0mm 50m Galv	900mm	50mm	1.0mm	50m	1
HX2005050*	Netting - Hex 2000x50x1.0mm 50m Galv	2000mm	50mm	1.0mm	50m	1
*Commonly used in roofing applications						
HX907550	Netting - Hex 900x75x1.0mm 50m Galv	900mm	75mm	1.0mm	50m	1
HX2007550*	Netting - Hex 2000x75x1.0mm 50m Galv	2000mm	75mm	1.0mm	50m	1
*Commonly used in roofing applications						
HX10664114100*	Netting - Hex 1066x41x1.4mm 100m Galv	1066mm	41mm	1.4mm	100m	1
HX1066411450*	Netting - Hex 1066x41x1.4mm 50m Galv	1066mm	41mm	1.4mm	50m	1
HX450411450*	Netting - Hex 450x41x1.4mm 50m Galv	450mm	41mm	1.4mm	50m	1
*Commonly used for rabbit fencing and pest control						

## PVC COATED HEXAGONAL WIRE NETTING

**Hot dipped galvanised then PVC coated.** Commonly used for chicken coops, bird aviaries and rabbit hutches.

ITEM CODE	DESCRIPTION	WIDTH	DIAMOND SIZE	GAUGE	LENGTH	ORDER QUANTITY
HX90135PVC	Netting - Hex 900x13x0.7mm 5m PVC Green	900mm	13mm	0.7mm	5m	9
HX90195PVC	Netting - Hex 900x19x0.9mm 5m PVC Green	900mm	19mm	0.9mm	5m	9
HX90255PVC	Netting - Hex 900x25x0.9mm 5m PVC Green	900mm	25mm	0.9mm	5m	9
HX90505PVC	Netting - Hex 900x50x1.0mm 5mtr PVC Green	900mm	50mm	1.0mm	5m	9

## SQUARE WELDED NETTING

**Hot dipped galvanised after netting is welded.** Commonly used for bird aviaries, rabbit hutches and chicken coops.

ITEM CODE	DESCRIPTION	WIDTH	SQUARE SIZE	GAUGE	LENGTH	ORDER QUANTITY
SW90135	Netting - Square Welded 900x13x1.0mm 5mtr Galv	900mm	13mm	1.0mm	5m	9
SW901310	Netting - Square Welded 900x13x1.0mm 10mtr Galv	900mm	13mm	1.0mm	10m	6
SW901330	Netting - Square Welded 900x13x1.0mm 30mtr Galv	900mm	13mm	1.0mm	30m	1
SW90195	Netting - Square Welded 900x19x1.0mm 5mtr Galv	900mm	19mm	1.0mm	5m	9
SW901910	Netting - Square Welded 900x19x1.0mm 10mtr Galv	900mm	19mm	1.0mm	10m	6
SW901930	Netting - Square Welded 900x19x1.0mm 30mtr Galv	900mm	19mm	1.0mm	30m	1
SW90255	Netting - Square Welded 900x25x1.0mm 5mtr Galv	900mm	25mm	1.0mm	5m	9
SW902510	Netting - Square Welded 900x25x1.0mm 10mtr Galv	900mm	25mm	1.0mm	10m	6
SW902530	Netting - Square Welded 900x25x1.0mm 30mtr Galv	900mm	25mm	1.0mm	30m	1
SW90505	Netting - Square Welded 900x50x2.0mm 5mtr Galv	900mm	50mm	2.0mm	5m	9
SW905030	Netting - Square Welded 900x50x2.0mm 30mtr Galv	900mm	50mm	2.0mm	30m	1



SW901310



SW901330



SW902510



SW902530

## PVC COATED SQUARE WELDED NETTING

**Hot dipped galvanised then PVC coated.** Commonly used for chicken coops, bird aviaries and rabbit hutches.

ITEM CODE	DESCRIPTION	WIDTH	SQUARE SIZE	GAUGE	LENGTH	ORDER QUANTITY
SW90135PVC	Netting - Square Welded 900x13x1.0mm 5mtr PVC Green	900mm	13mm	1.0mm	5m	9
SW90195PVC	Netting - Square Welded 900x19x1.0mm 5mtr PVC Green	900mm	19mm	1.0mm	5m	9
SW90255PVC	Netting - Square Welded 900x25x1.0mm 5mtr PVC Green	900mm	25mm	1.0mm	5m	9



SW90135PVC

## SAFETY FENCE

A fluorescent orange safety mesh which can be used as a temporary safety fence, warning barrier, pedestrian fence and snow fence. Can also be used at construction sites, open excavations, sporting events and restricted access areas.

ITEM CODE	DESCRIPTION	ORDER QUANTITY
PSF9030	Plastic Orange Safety Netting 900mm X 30m	1



PSF9030

## STEEL “Y” POSTS

**Commonly known as Waratah Standards and Star Pickets.** Primarily used for concrete boxing, temporary fencing and gardening applications.

ITEM CODE	DESCRIPTION	QUANTITY PER BUNDLE	QUANTITY PER PALLET
YPOST0.4	0.40m Black Tar Coated	10	400
YPOST0.5	0.50m Black Tar Coated	10	400
YPOST0.8	0.80m Black Tar Coated	10	400
YPOST1.35	1.35m Black Tar Coated	10	400
YPOST1.5	1.50m Black Tar Coated	10	400
*YPOST1.5/8HOLES	1.50m Black Tar Coated (8 HOLES)	10	400
YPOST1.65	1.65m Black Tar Coated	10	400
YPOST1.65/8HOLES	1.65m Black Tar Coated (8 HOLES)	10	400
YPOST1.8	1.80m Black Tar Coated	10	400
YPOST2.6	2.60m Black Tar Coated	10	400
YPOST0.4GALV	0.40m Galvanised	10	400
YPOST0.5GALV	0.50m Galvanised	10	400
YPOST0.8GALV	0.80m Galvanised	10	400
YPOST1.35GALV	1.35m Galvanised	10	400
YPOST1.5GALV	1.50m Galvanised	10	400
YPOST1.65GALV	1.65m Galvanised	10	400
YPOST1.8GALV	1.80m Galvanised	10	400

\*indent order only



YPOST0-4GALV



YPOST0-5



YPOST0-5GALV



YPOST0-8



YPOST0-8GALV



YPOST1-5



YPOST1-5GALV



YPOST1-8GALV



YPOST1-35



YPOST1-35GALV



YPOST1-65



YPOST1-65GALV



## SAFETY CAPS

**Also known as reo or rebar socks, used to prevent injury on site by covering the sharp edges present on Y posts and reinforcing bar.**

Fits 16mm steel rod as well as Y posts. A handy hole is available on the side of the safety cap to feed tie wire or cable ties through for a secure fix.

ITEM CODE	DESCRIPTION	ORDER QUANTITY
REOSBC/20	SAFETY CAPS (20 PER BAG)	10
REOSBC	SAFETY CAPS (100 PER BAG)	1



REOSBC-20

## VINEYARD STAKES


**A reusable vine support stake which is essential for growing straight grapevine trunks.**

ITEM CODE	DESCRIPTION	QUANTITY PER PACK
R6X800	R6 X 0.8M	100
R6X1000	R6 X 1.0M	100
R6X1200	R6 X 1.2M	100

## GATE FITTINGS

**Gudgeons - Through Post.** Used to attach and secure rural gates to wooden posts.


ITEM CODE	DESCRIPTION	PIN GAUGE	LENGTH	PIN LENGTH	QUANTITY PER CARTON
GFGTP12S190L	12 x 190mm Thru Post Gudgeon	12mm	190mm	50mm	50
GFGTP16S200L	16 x 200mm Thru Post Gudgeon	16mm	200mm	50mm	20
GFGTP16S250L	16 x 250mm Thru Post Gudgeon	16mm	250mm	50mm	30
GFGTP20S275L	20 x 275mm Thru Post Gudgeon	20mm	275mm	50mm	20
GFGTP20L275L	20 x 275mm Thru Post Gudgeon (Long Pin)	20mm	275mm	70mm	20
GFGTP20S350L	20 x 350mm Thru Post Gudgeon	20mm	350mm	50mm	20
GFGTP20L350L	20 x 350mm Thru Post Gudgeon (Long Pin)	20mm	350mm	70mm	20



## Gudgeons - Lock Through Post

Used to attach and secure rural gates to wooden posts.


ITEM CODE	DESCRIPTION	PIN GAUGE	LENGTH	PIN LENGTH	QUANTITY PER CARTON
GFGLT16S250L	16 x 250mm Lock Thru Gudgeon	16mm	250mm	50mm	20
GFGLT20S275L	20 x 275mm Lock Thru Gudgeon	20mm	275mm	50mm	10
GFGLT20L275L	20 x 275mm Lock Thru Gudgeon (Long Pin)	20mm	275mm	70mm	12
GFGLT20S350L	20 x 350mm Lock Thru Gudgeon	20mm	350mm	50mm	12
GFGLT20L350L	20 x 350mm Lock Thru Gudgeon (Long Pin)	20mm	350mm	70mm	12



## Gudgeons - Screw In

Used to attach and secure rural gates to wooden posts.


ITEM CODE	DESCRIPTION	PIN GAUGE	LENGTH	PIN LENGTH	QUANTITY PER CARTON
GFGS12S100L	12 x 100mm Screw Gudgeon	12mm	100mm	50mm	50
GFGS16S105L	16 x 105mm Screw Gudgeon	16mm	105mm	50mm	50
GFGS16S140L	16 x 140mm Screw Gudgeon	16mm	140mm	50mm	50
GFGS20S150L	20 x 150mm Screw Gudgeon	20mm	150mm	50mm	30
GFGS20L150L	20 x 150mm Screw Gudgeon (Long Pin)	20mm	150mm	70mm	25
GFGS20S200L	20 x 200mm Screw Gudgeon	20mm	200mm	50mm	25
GFGS20L200L	20 x 200mm Screw Gudgeon (Long Pin)	20mm	200mm	70mm	20



## Gudgeons - Barbed Drive

Used to attach and secure rural gates to wooden posts.

ITEM CODE	DESCRIPTION	PIN GAUGE	LENGTH	PIN LENGTH	QUANTITY PER CARTON
GFGD20L200RH	20 x 200mm Ridged Drive Gudgeon	20mm	200mm	70mm	25



## Latches

Used to attach and secure rural gates to wooden posts.

ITEM CODE	DESCRIPTION	QUANTITY PER CARTON
GFB10500	Banana Latch 10x500 HDG	10
GFTWC2025	Two Way Catch For 20/25 NB HDG	50
GFFGFH	Ring Latch & Staple + 300mm Chain	40
GFFG-S	Latch Staple Only	1
GFSL300S	Spring latch & Staple + 300mm Chain	40



## Weld On Lugs and Pins

Used to attach and secure rural gates to wooden posts.


ITEM CODE	DESCRIPTION	PIN GAUGE	LENGTH	STEEL THICKNESS	QUANTITY PER CARTON
GFSW20	20 x 42 x 3 Weld on Lug	20mm	42mm	3mm	100
GFGW20L	20 x 70 x 5 Weld on Pin	20mm	70mm	5mm	50



## Gudgeons - Plate

Suitable for flush mounting on pillars and posts where through post gudgeons are unsuitable.


ITEM CODE	PIN GAUGE	PIN LENGTH	QUANTITY PER CARTON
GFGSP16S	16mm	42mm	30
GFGSP20S	20mm	50mm	15

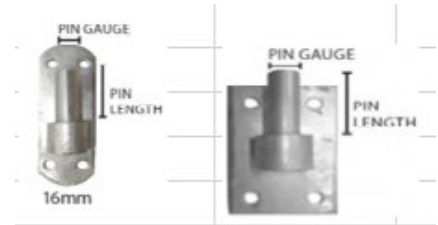

## Adjustable Gate Hinge

Used to attach and secure rural gates to wooden posts.

ITEM CODE	PIN GAUGE	PIPE	QUANTITY PER CARTON
GFHC16-20H*	16mm	20nb	20
GFHC20-25H	20mm	25nb	25
* Includes insert to suit 12mm pin			



## Hinge Straps

Used to attach and secure rural gates to wooden posts.

ITEM CODE	PIN GAUGE	WIDTH	LENGTH	QUANTITY PER CARTON
GFHS16-150	16mm	50mm	150mm	40
GFHS16-225	16mm	50mm	225mm	40
GFHS16-300	16mm	50mm	300mm	40
GFHS20-300	20mm	50mm	300mm	20
GFHS20-375	20mm	50mm	375mm	20
GFHS20-450	20mm	50mm	450mm	20
GFHS20-600	20mm	50mm	600mm	20
GFSL16	Plastic Sleeve 16mm socket/12mm pin			10
GFSL20	Plastic Sleeve 20mm socket/16mm pin			10



## ECONOMY CHAINLINK GATES

**Used by sheep farmers for reliable lamb containment.** Also suitable for lifestyle blocks or situations where stock proofing is essential.

ITEM CODE	DESCRIPTION
GEC0.92	Gate House Chainlink x 0.92m
GEC1.45L	Gate House Chainlink x 1.45m Left
GEC1.45R	Gate House Chainlink x 1.45m Right
GEC3.05	Gate Economy Chainlink x 3.05m
GEC3.66	Gate Economy Chainlink x 3.66m
GEC4.27	Gate Economy Chainlink x 4.27m



GEC0-92



GEC3-05

## ECONOMY CHAINLINK DEER GATES

**A popular style of deer gate which offers stock proofing.**

ITEM CODE	DESCRIPTION
GC3.05DEER1.9	Gate Deer Chainlink 1.9m x 3.05m
GC3.66DEER1.9	Gate Deer Chainlink 1.9m x 3.66m
GC4.27DEER1.9	Gate Deer Chainlink 1.9m x 4.27m




GC4-27DEER1-9



### BARRED GATES

EuroSteel barred gates offer value and quality and are popular with sheep, beef and dairy farmers.

ITEM CODE	DESCRIPTION
GE3.05	Gate Economy Barred 6mm x 3.05m
GE3.66	Gate Economy Barred 6mm x 3.66m
GE4.27	Gate Economy Barred 6mm x 4.27m
GS3.05	Gate Standard Barred 8mm x 3.05m
GS3.66	Gate Standard Barred 8mm x 3.66m
GS4.27	Gate Standard Barred 8mm x 4.27m
GH3.05	Gate Heavy Barred 10mm x 3.05m
GH3.66	Gate Heavy Barred 10mm x 3.66m
GH4.27	Gate Heavy Barred 10mm x 4.27m

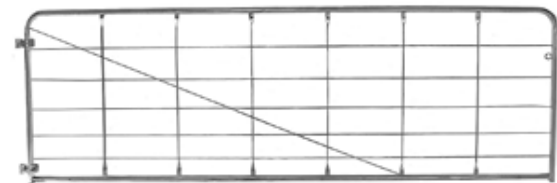

GE3.05

# FASTENING PRODUCTS

EuroSteel offers a range of nail types available in different finishes and heads to suit different applications.



## Nail coatings:

**Galvanised** - Galvanised coated nails are designed for increased resistance to corrosion and to give greater durability. Galvanised nails are designed to be used in applications where they are likely to be subject to some moisture in service.

## Nail types:

**Flat Head Nails** - Used where the nail head is visible, such as house framing, fencing and landscaping

**Twisted Flathead** - Used for utility sheds, farm buildings and galvanised iron fencing.

**Jolt Head Nails** - A small rounded head driven flush with the timber surface or countersunk below the surface with a nail punch

**Decking Nails** - Have a countersunk head so the head does not protrude above the timber, annular grooved to provide greater holding power

**Insulator Nails** - Used for securing electric fence insulators to wooden posts

**Plasterboard Clouts** - For fixing plasterboard to timber framing. Annular grooved for greater holding power, with a countersunk head to prevent the paper from tearing.

**Roofing Nails** - For fastening corrugated iron roofing to timber. The neoprene seal provides an effective weatherproof seal and the spiral rolled shank provides greater holding power.

**Twisted Springhead Nails** - Used for utility sheds, farm buildings and galvanised iron fencing

## GALVANISED FLAT HEAD NAILS

500G CARTON (5 PER CARTON)

ITEM CODE	NAIL SIZE
GFC050250	50 X 2.50mm GALV FLAT HEAD
GFC060280	60 X 2.80mm GALV FLAT HEAD
GFC075315	75 X 3.15mm GALV FLAT HEAD
GFC090355	90 X 3.55mm GALV FLAT HEAD
GFC100400	100 X 4.00mm GALV FLAT HEAD
GFC125530	125 X 5.30mm GALV FLAT HEAD
GFC150600	150 X 6.00mm GALV FLAT HEAD

5KG CARTON (4 PER CARTON)

ITEM CODE	NAIL SIZE
GFH050250	50 X 2.50mm GALV FLAT HEAD
GFH060280	60 X 2.80mm GALV FLAT HEAD
GFH075315	75 X 3.15mm GALV FLAT HEAD
GFH075530	75 x 5.30mm GALV FLAT HEAD
GFH090355	90 X 3.55mm GALV FLAT HEAD
GFH100400	100 X 4.00mm GALV FLAT HEAD
GFH125530	125 X 5.30mm GALV FLAT HEAD
GFH150600	150 X 6.00mm GALV FLAT HEAD

2KG CARTON (8 PER CARTON)

ITEM CODE	NAIL SIZE
GFQ060280	60 X 2.80mm GALV FLAT HEAD
GFQ075315	75 X 3.15mm GALV FLAT HEAD
GFQ100400	100 X 4.00mm GALV FLAT HEAD
GFQ125530	125 X 5.30mm GALV FLAT HEAD
GFQ150600	150 X 6.00mm GALV FLAT HEAD

15KG CARTON (1 PER CARTON)

ITEM CODE	NAIL SIZE
GFB060280	60 x 2.80mm GALV FLAT HEAD
GFB075315	75 x 3.15mm GALV FLAT HEAD
GFB075530	75 x 5.30mm GALV FLAT HEAD
GFB100400	100 x 4.00mm GALV FLAT HEAD
GFB125530	125 x 5.30mm GALV FLAT HEAD
GFB150600	150 x 6.00mm GALV FLAT HEAD



GFC100400



GFC150600



GFH075530



GFQ100400



GFB075530

## GALVANISED TWISTED FLATHEAD

### 5KG CARTON (4 PER CARTON)

ITEM CODE	DESCRIPTION
LGTFH7537H	75 X 3.75mm GALV SQUARE TWIST F/ HEAD X 5KG

## GALVANISED A/G DECKING NAILS

### 5KG CARTON (4 PER CARTON)

ITEM CODE	DESCRIPTION
GFLH075330	75 X 3.30mm GALV A/G DECKING NAIL

## GALVANISED INSULATOR NAILS

### 25KG CARTON (1 PER CARTON)

ITEM CODE	DESCRIPTION
LGTFH7537B	75 X 3.75mm GALV SQUARE TWIST F/ HEADX 25KG

### 5KG CARTON (4 PER CARTON)

ITEM CODE	DESCRIPTION
INSULATOR 50MM	50mm GALV INSULATOR NAIL

## GALVANISED JOLT HEAD NAILS

### 500G CARTON (5 PER CARTON)

ITEM CODE	DESCRIPTION
GJC100400	100 X 4.00mm GALV JOLT HEAD

## GALVANISED PLASTERBOARD CLOUTS

### 500G CARTON (5 PER CARTON)

ITEM CODE	DESCRIPTION
GGC030250	30 X 2.50mm GALV P/BOARD CLOUT
GGC040250	40 X 2.50mm GALV P/BOARD CLOUT

### 5KG CARTON (4 PER CARTON)

ITEM CODE	DESCRIPTION
GJH100400	100 X 4.00mm GALV JOLT HEAD

### 5KG CARTON (4 PER CARTON)

ITEM CODE	DESCRIPTION
GGH040250	40 X 2.50mm GALV P/BOARD CLOUT



LGTFH7537H



GFLH075330



GJC100400



GGC030250

## GALVANISED ROOFING

### 50 NAIL PACKS (5 PER CARTON)

ITEM CODE	DESCRIPTION
NGVC060N	60 X 4.00mm ROOFING SUPERSEAL
NGVC075N	75 X 4.00mm ROOFING SUPERSEAL

### 300 NAIL PACKS (4 PER CARTON)

ITEM CODE	DESCRIPTION
NGVH060N	60 X 4.00mm ROOFING SUPERSEAL
NGVH075N	75 X 4.00mm ROOFING SUPERSEAL

## GALVANISED TWISTED SPRINGHEAD NAILS

### 500G (5 PER CARTON)

ITEM CODE	DESCRIPTION
GTSC060375	60 X 3.75mm
GTSC075375	75 X 3.75mm

### 2.5KG (4 PER CARTON)

ITEM CODE	DESCRIPTION
GTSH060375	60 X 3.75mm
GTSH075375	75 X 3.75mm

## FENCING STAPLES - LOOSE

### 500G CARTON (5 PER CARTON)

ITEM CODE	DESCRIPTION
FSTPP30315B	30 x 3.15mm Barbed
FSTPP4040B	40 x 4.0mm Barbed
FSTPP5040B	50 x 4.0mm Barbed
FSTPP1920G	19 x 2.0mm Plain
FSTPP2728G	27 x 2.8mm Plain
FSTPP30315G	30 x 3.15mm Plain
FSTPP4040G	40 x 4.0mm Plain
FSTPP5040G	50 x 4.0mm Plain

### 2.5KG CARTON (8 PER CARTON)

ITEM CODE	DESCRIPTION
FSTHPP30315B	30 x 3.15mm Barbed
FSTHPP4040B	40 x 4.0mm Barbed
FSTHPP5040B	50 x 4.0mm Barbed
FSTHPP30315G	30 x 3.15mm Plain
FSTHPP4040G	40 x 4.0mm Plain
FSTHPP5040G	50 x 4.0mm Plain



NGVH060N



GTSC060375



FSTPP30315B



**5KG CARTON (4 PER CARTON)**

ITEM CODE	DESCRIPTION
FSTHP2728B	27 x 2.8mm Barbed
FSTHP30315B	30 x 3.15mm Barbed
FSTHP4040B	40 x 4.0mm Barbed
FSTHP4540B	45 x 4.0mm Barbed
FSTHP5040B	50 x 4.0mm Barbed
FSTHP2728G	27 x 2.8mm Plain
FSTHP30315G	30 x 3.15mm Plain
FSTHP4040G	40 x 4.0mm Plain
FSTHP5040G	50 x 4.0mm Plain

**20KG CARTON (1 PER CARTON)**

ITEM CODE	DESCRIPTION
FSTP2728B	27 x 2.8mm Barbed
FSTP30315B	30 x 3.15mm Barbed
FSTP4040B	40 x 4.0mm Barbed
FSTP4540B	45 x 4.0mm Barbed
FSTP5040B	50 x 4.0mm Barbed
FSTP2728G	27 x 2.8mm Plain
FSTP30315G	30 x 3.15mm Plain
FSTP4040G	40 x 4.0mm Plain
FSTP5040G	50 x 4.0mm Plain
30MM HDGALVBARB	30 x 3.15mm Barbed HDG
50MM HDGALVBARB	50 x 4.0mm Barbed HDG
30MM HDGALV GSC	30 x 3.15mm Plain HDG
50MM HDGALV GSC	50 x 4.0mm Plain HDG



FSTHP2728B



FSTHP2728G



FSTP2728B



FSTP2728G



30MMHDGALVBARB



30MMHDGALVGSC

## CONCRETE FENCE POST STAPLES

ITEM CODE	DESCRIPTION
CONCRETE F/POST	140MM CONCRETE FENCEPOST STAPLES

## 'D' HEAD NAILS WITH MULTI-CAP FUEL CELLS

ITEM CODE	NAIL SIZE	QUANTITY PER PACK
DH31/90B(GAS)	90 x 3.15mm	3,000 Nails / 3 Cells
DH31/75B(GAS)	75 x 3.15mm	3,000 Nails / 3 Cells

## Galvanised Smooth

ITEM CODE	NAIL SIZE	QUANTITY PER PACK
DH31/90G(GAS)	90 x 3.15mm	3,000 Nails / 3 Cells
DH28/50G(GAS)	50 x 2.8mm	3,000 Nails / 3 Cells

## Galvanised - Ring Shank

ITEM CODE	NAIL SIZE	QUANTITY PER PACK
DH31/75RSG(GAS)	75 x 3.15mm	3,000 Nails / 3 Cells
DH28/65RSG(GAS)	65 x 2.8mm	3,000 Nails / 3 Cells



DH31/90B



DH31/90G



DH31/75RSG

### 3000 PACK 'D' HEAD NAILS ONLY (gas cell optional)

#### Bright Smooth

ITEM CODE	NAIL SIZE	NAILS PER PACK
DH31/90B	90 x 3.15mm	3000
DH31/75B	75 x 3.15mm	3000

#### Galvanised - Smooth

ITEM CODE	NAIL SIZE	NAILS PER PACK
DH31/90G	90 x 3.15mm	3000
DH28/50G	50 x 2.8mm	3000

#### Galvanised - Ring Shank

ITEM CODE	NAIL SIZE	NAILS PER PACK
DH31/75RSG	75 x 3.15mm	3000
DH28/65RSG	65 x 2.8mm	3000



BNWBCG6010



BNWBCG10010



BNWBG7510

EuroSteel offer a wide range of galvanised nuts, bolts and washers ideal for use in construction, DIY and rural applications

#### BOLT COACH - GALVANISED

ITEM CODE	DESCRIPTION	QUANTITY PER PACK
BNWBCG6010	BOLT COACH GALV M10 X 60 BNW HDG	10
BNWBCG6510	BOLT COACH GALV M10 X 65 BNW HDG	10
BNWBCG7510	BOLT COACH GALV M10 X 75 BNW HDG	10
BNWBCG9010	BOLT COACH GALV M10 X 90 BNW HDG	10
BNWBCG10010	BOLT COACH GALV M10 X 100 BNW HDG	10
BNWBCG11010	BOLT COACH GALV M10 X 110 BNW HDG	10
BNWBCG12010	BOLT COACH GALV M10 X 120 BNW HDG	10
BNWBCG13010	BOLT COACH GALV M10 X 130 BNW HDG	10
BNWBCG14010	BOLT COACH GALV M10 X 140 BNW HDG	10
BNWBCG15010	BOLT COACH GALV M10 X 150 BNW HDG	10
BNWBCG16010	BOLT COACH GALV M10 X 160 BNW HDG	10
BNWBCG17010	BOLT COACH GALV M10 X 170 BNW HDG	10
BNWBCG18010	BOLT COACH GALV M10 X 180 BNW HDG	10

#### BOLT HEX HEAD - GALVANISED

ITEM CODE	DESCRIPTION	QUANTITY PER PACK
BNWBG7510	M10 M 75mm BNW	10
BNWBG9010	M10 M 90mm BNW	10
BNWBG11010	M10 M 110mm BNW	10
BNWBG12010	M10 M 120mm BNW	10

## BATTEN SCREWS - GALVANISED

ITEM CODE	DESCRIPTION	QUANTITY PER PACK
BNWBSG1410050	14GX100 C3	50
BNWBSG1412550	14GX125 C3	50

## COACH SCREWS - GALVANISED

ITEM CODE	DESCRIPTION	QUANTITY PER PACK
BNWCSG7510	M10 X 75 HDG	10
BNWCSG10010	M10 X 100 HDG	10
BNWCSG12010	M10 X 120 HDG	10
BNWCSG15010	M10 X 150 HDG	10

## WASHERS - GALVANISED

ITEM CODE	DESCRIPTION	QUANTITY PER PACK
BNWWRG2420	M10 X 24 X 3.0mm	20
BNWWRG2450	M10 X 24 X 3.0mm	50
BNWWSG5020	M10X50X50X3.0mm	20



BNWCSG7510



BNWCSG12010



BNWWRG2420





**P** +64 (09) 271 1627

**W** [eurosteel.co.nz](http://eurosteel.co.nz)

